



Architectural Specifications


LOCK ROUTING

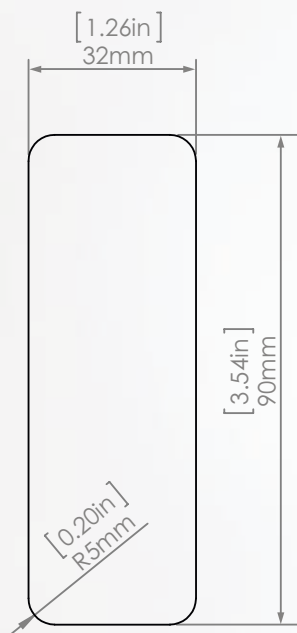

FRONT VIEW

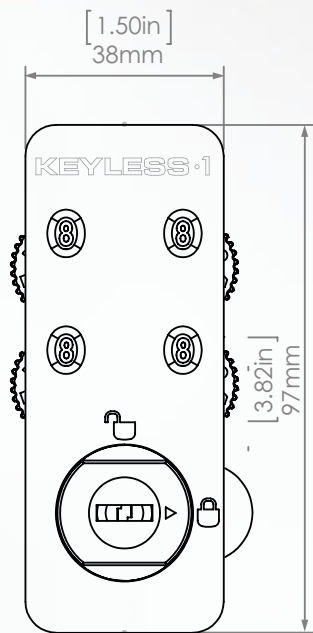

TOP VIEW

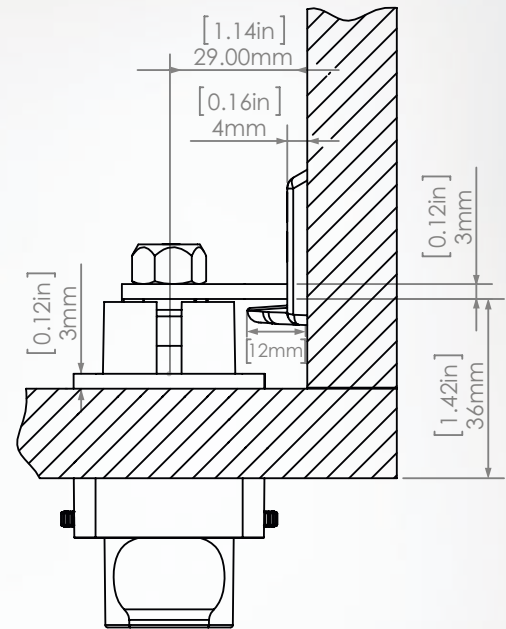

FEATURES:

- Sustainable - no batteries, no wires, no waste
- Reprogrammable to alternate master keys. Simply insert new manager key to rekey.
- Easy keyless operation
- Locks with any user selected 4 digit code
- 10,000 possible combinations
- Break-away-knob for maximum security
- Assigned or shared use
- Manager access retains user code
- Resets from front
- Solid metal design for long term heavy use/no plastic components
- Satin nickel finish

- For indoor use in wet or dry areas
- Integrated knob/pull
- Recess mounted
- Accommodates doors 1-32mm/0.04"-1.26" thick
- Standard cam offset 25mm/1"
- Converts easily from other lock types
- 5 year warranty

OPTIONAL ACCESSORIES

- Strike plate with 12mm/0.47" catch
- ADA lever – meets ADA requirements
- Cam with offset 32mm/1.26", 39mm/1.54"
- Card Actuator