



Engineered system for enhanced shock-absorption and structure-borne sound isolation in gyms, free-weight, and multi-purpose areas.

Material Composition

PUR bonded, engineered modular system with a patented wear layer for enhanced stability, and high damping components for outstanding shock and vibration isolation, particularly in the low frequency range. Available in different designs and colors.



Thickness

- 70 mm

Test Data

Drop Height 1000 mm. Various weights.
Contact us for detailed information

Performance comparison: standard gym flooring vs. the new Regupol AkustiPro

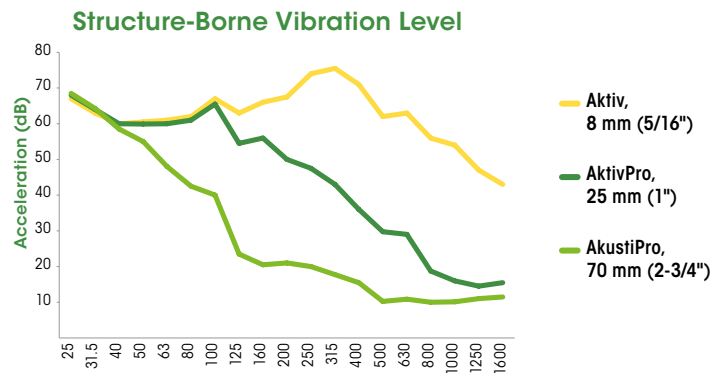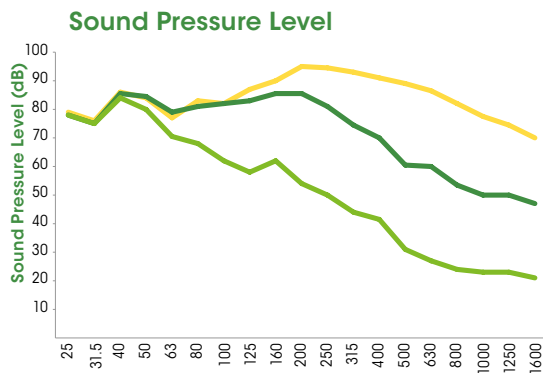


Sound Pressure Level in Receiving Room [dB]	25	31.5	40	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600
Aktiv	79.1	77.6	86.4	83.4	76.5	82.8	82.5	86.7	90.2	94.5	94.1	92.4	91.2	88.4	86.1	82.0	78.0	74.6	69.9
AktivPro	77.9	75.5	85.9	84.7	78.9	80.8	82.0	83.1	85.6	85.5	81.2	74.4	69.9	60.3	59.4	54.0	49.6	49.2	47.2
AkustiPro	78.2	74.9	83.8	79.9	70.6	67.2	61.1	58.6	60.9	53.1	50.1	44.0	41.8	31.0	27.1	24.5	23.3	22.9	20.2

Please contact us for detailed testing information and product data.


Core Series




AP10100
Jet Black




AP10101
Gray Hound



AP10102
Jayz Blue




AP10103
Blue Streak




AP10104
Titan Tan


Strength Series




AP35100
Gray Ghost




AP35101
Devil Blue



AP35102
Green Monster




AP35103
Red Tempest




AP35104
Tenacious Tan


Intense Series




AP95100
Grizzly Brown




AP95102
Thunder Gray




AP95103
Red Zone




AP95104
Desert Storm




AP95105
Avalanche Gray




AP95106
Mesa Sunset



AP95107
Smoky Canyon



AP95108
Wilderness



AP95109
Baltic Sea

Regupol America, LLC is a product manufacturer and does not represent itself as a consultant, engineer, or advisor in construction methods, standards, and compliance. Therefore, Regupol America only warrants its products under its standard limited warranty (available by request), and does not represent or warrant any advice, suggestions, instructions, whether formal or informal, oral or written, in conjunction with any sales of its products. Any such advice is not intended for a particular purpose and should not be acted or relied upon as such. Any such advice is not represented as being all-inclusive, correct, complete or up-to-date. The information and data contained herein are based on industry accepted testing, manufacturing tolerances and prior product usage as set forth. It is intended as descriptive of the performance characteristics and capabilities of Regupol/Regufoam and does not certify applicability for any particular or specific project. Technical assistance, calculations and design recommendations are available from Regupol America, and are subject to terms and conditions provided upon request.