

SPECIFICATIONS for Extrusions

HEIGHT	Corner Heights - Nominal 48" /// 72" Connector Heights - Nominal 48" /// 72"
WALL THICKNESS	.045 - .055"
STOCK LENGTHS	J Moulding 144" H Connector Nominal 48" /// 72"
MATERIAL	Aluminum Alloy & Temper 6063-T5
WEIGHT	.119 /// .176 /// .231 /// .412 /// lbs./ft.
BASE COLOR	Clear Anodized

SPECIFICATIONS for Panels


PANEL SIZES	Nominal 24" x 48" /// 48" x 48" /// 48" x 96"
PANEL MATERIAL	1/32" Vertical Grade High Pressure Laminate 3/8" PB Core FR, ULEF 1/32" Phenolic Backer Balance Sheet




Visit us online for specs, warranty, installation and maintenance guidelines /// crg.us.com

PARTS LIST for *Extrusions*

A OSP9498 OUTSIDE SQUARE CORNER + CAP

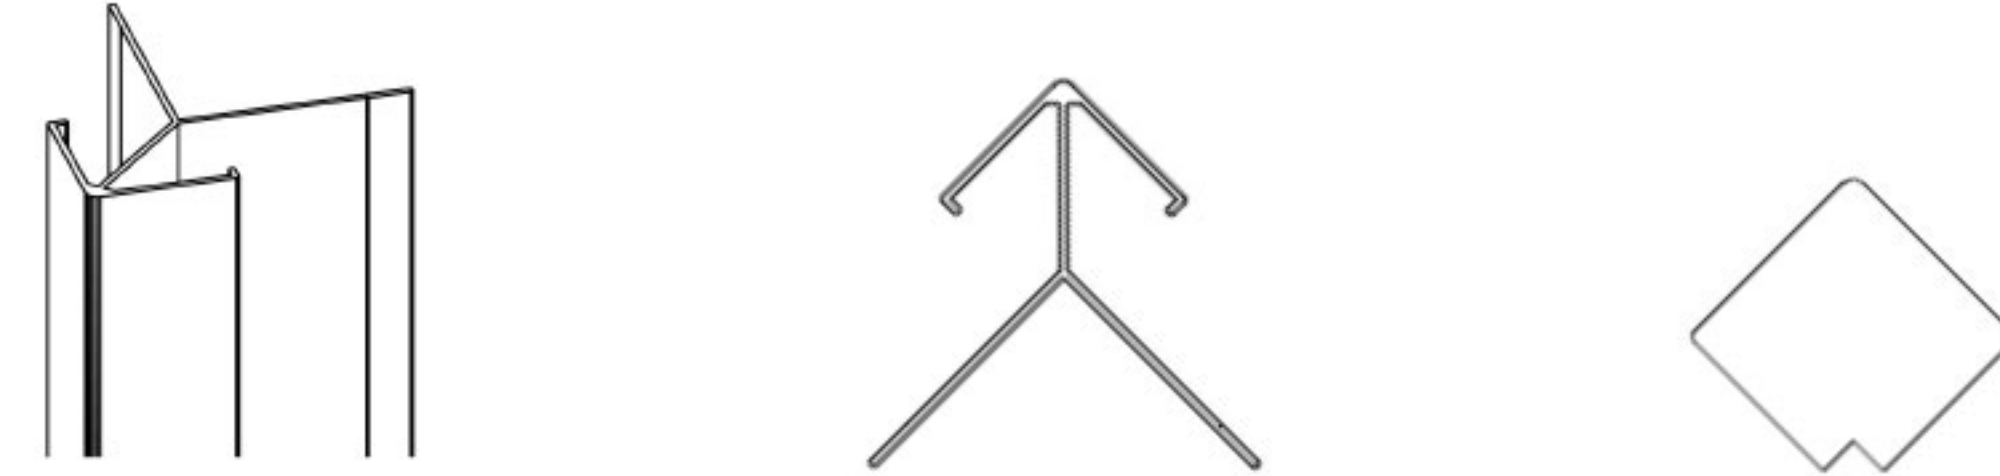


B ISP9497 INSIDE SQUARE CORNER + CAP

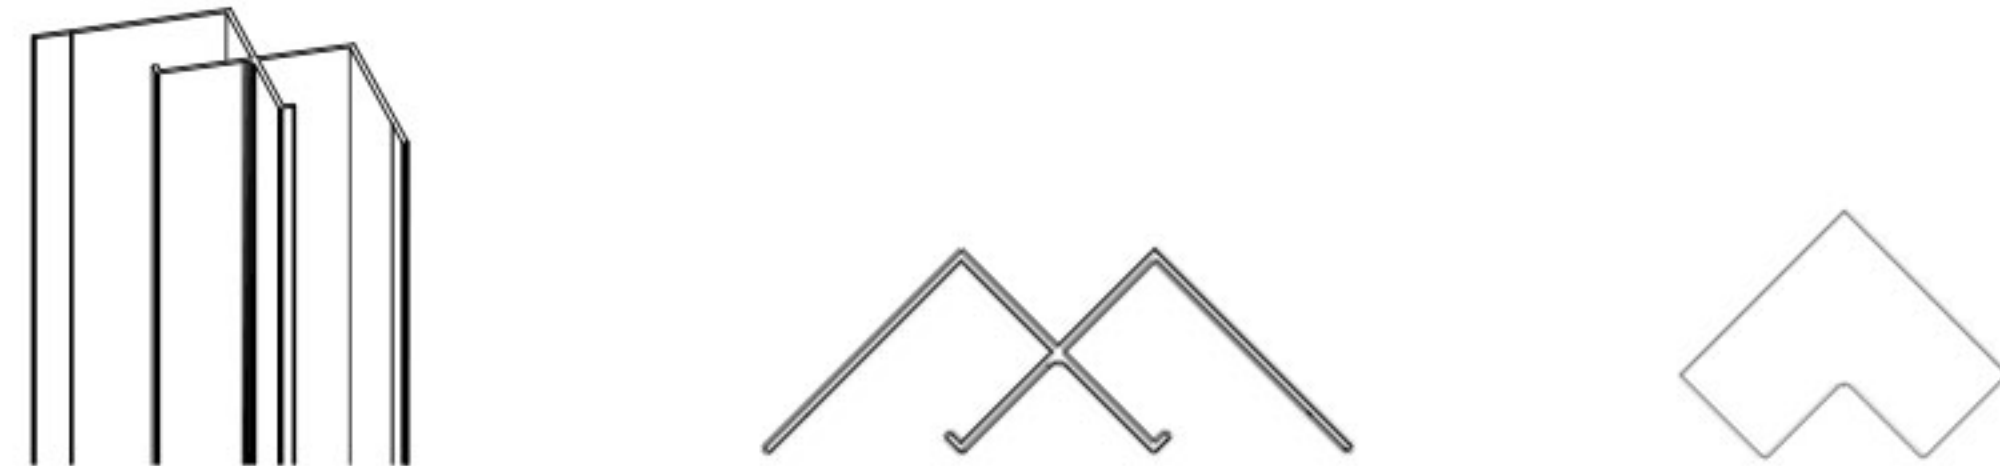


C OSP8964 OUTSIDE RADIUS CORNER + CAP




D ISP8965 INSIDE RADIUS CORNER + CAP

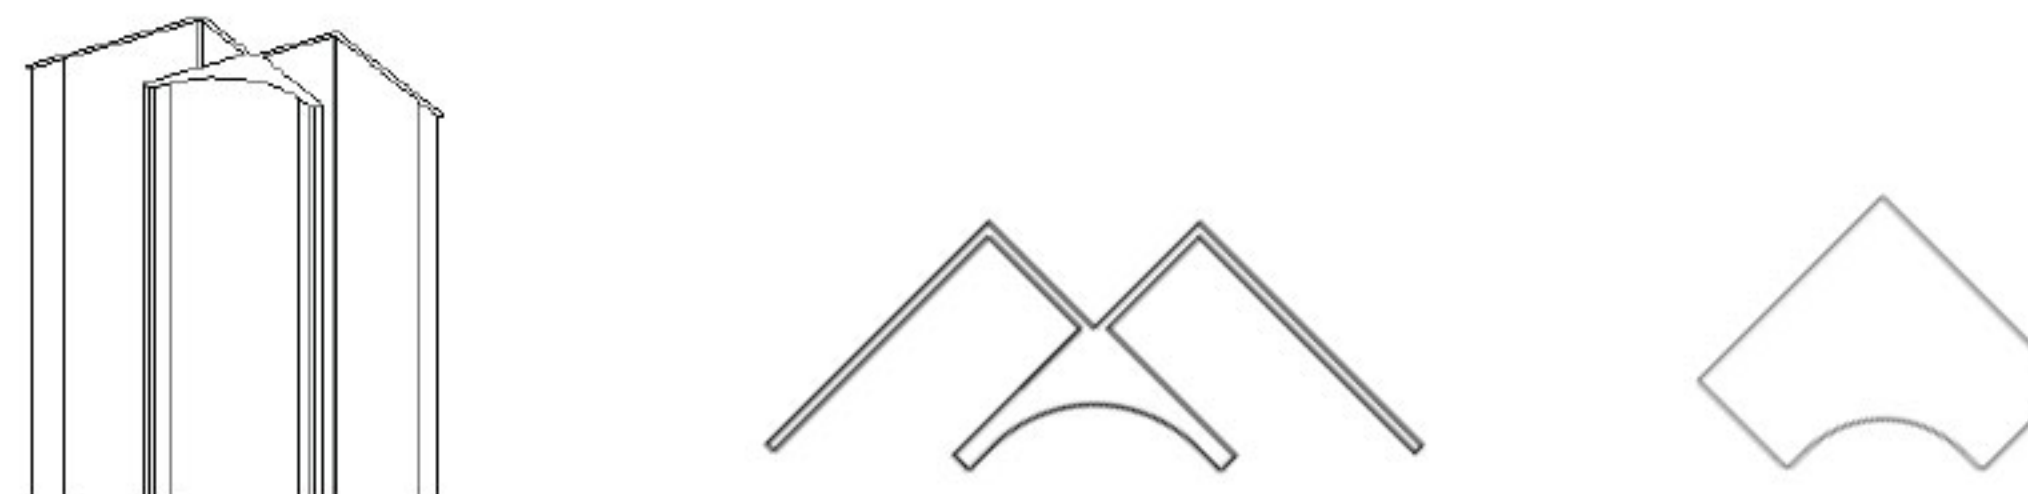

E OSP9273 OUTSIDE ARC CORNER + CAP

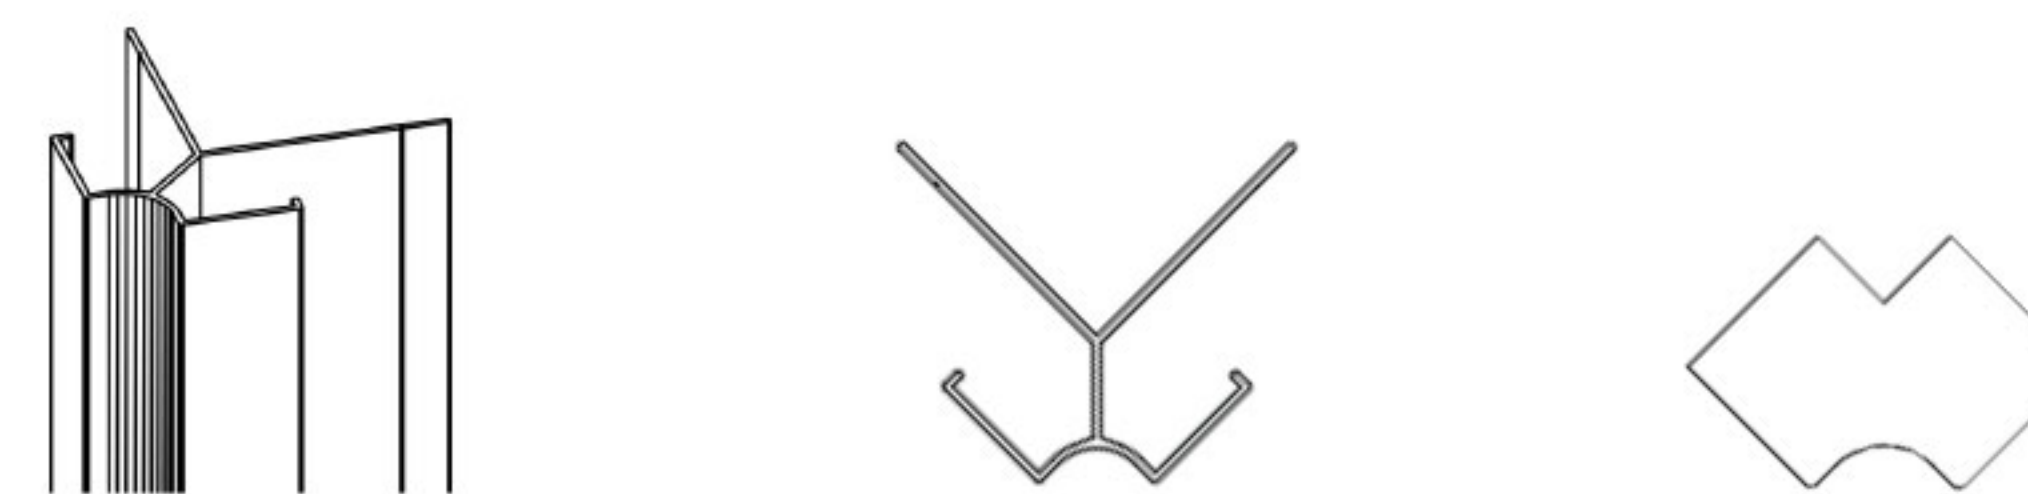

F ISP9274 INSIDE ARC CORNER + CAP

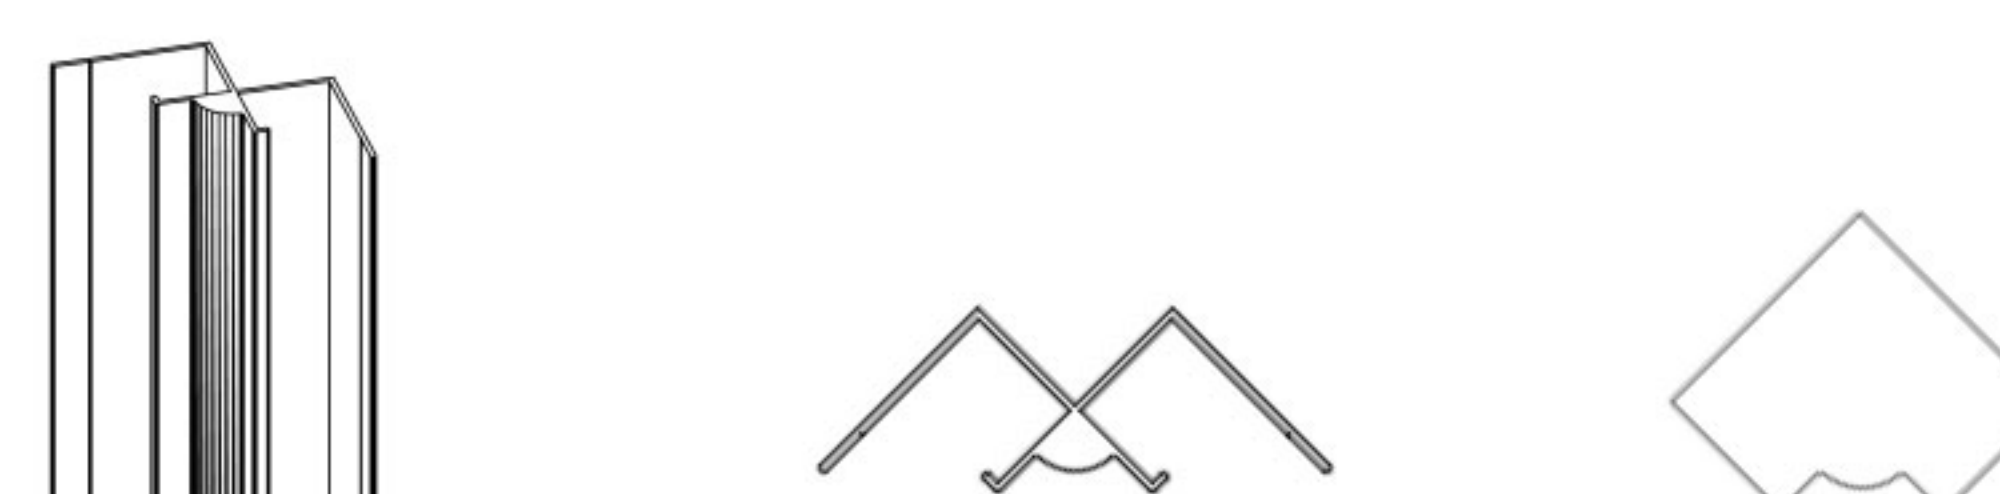

G JP7418 H JUNCTION BAR



H JP8966 J JUNCTION BAR

