



## PRODUCT FEATURES

- All metal housing
- IP55 rated, FCC, CE, and IC certified
- Brushed nickel or black finish
- Slim 0.33" (8.5mm) profile
- Visual and audible indicators
- Advanced auto unlock
- ADA compliant
- Non-handed

## FUNCTIONALITY

- Dual functionality - shared or assigned use
- Manage with the Basic or Advanced system

## INSTALLATION

- Designed for both new or retrofit installations
- Adaptable to multiple door thicknesses
- 1/2" (12.7mm) motorized deadbolt locking mechanism
- Snap-lock cable connector (patented) or pin connector




## POWER

- 3-4 year battery life with average use
- Powered by 4 premium AA batteries

## SUPPORT

- Onsite product updates
- Lifetime Support
- 2-year warranty

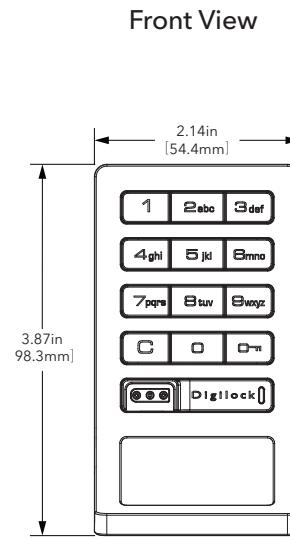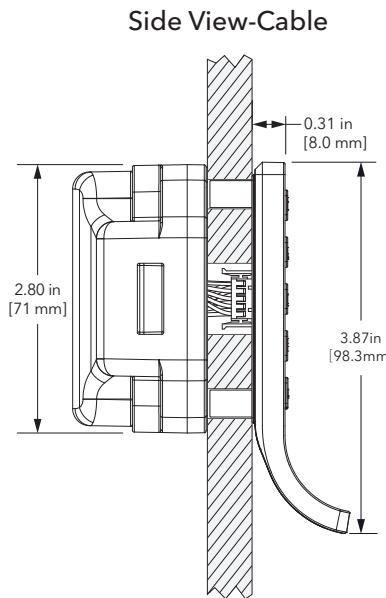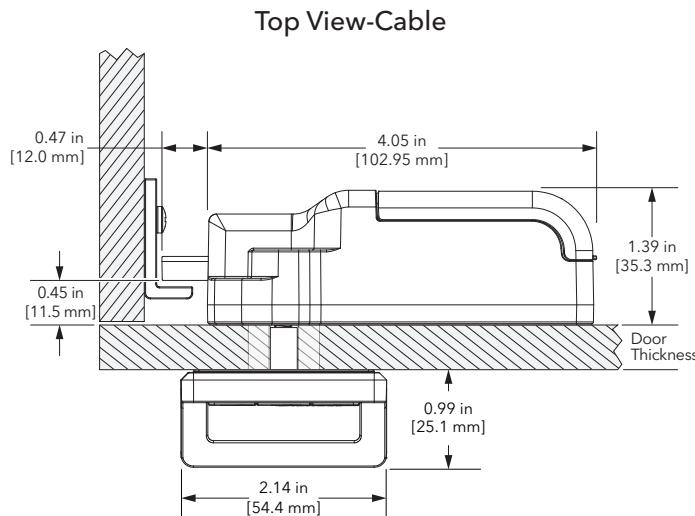

**Top View-Pin Connector**

0.47 in [12.0 mm]  
4.05 in [102.95 mm]  
1.19 in [30.2 mm]  
0.25 in [6.5 mm]  
0.99 in [25.1 mm]  
2.14 in [54.4 mm]

**Side View-Pin Connector**

2.80 in [71 mm]  
3.87 in [98.3 mm]  
0.31 in [8.0 mm]

090822

707 766 6000 | sales@digilock.com | www.digilock.com