

#### **PULASTIC CLASSIC 110**

A seamless multi-purpose sports floor that provides strength and performance for all levels of play and competition







- Pulastic Classic 110 is approved according to the EN 14904 Standard Category P1
- Approved by FIBA and IHF
- Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
- Good resiliency for comfort and injury prevention
- Seamless, non-porous and smooth surface for easy maintenance, repair and resurface options
- Excellent contact noise reduction for outstanding acoustic isolation
- Sustainability through high content of recycled and rapidly renewable raw materials
- Water based finish for very low odor during installation and maximum indoor clean air protection during use
- Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability

PROVEN Safety

**PROVEN Performance** 

**PROVEN**Winners



# Classic 110

INDOOR | MULTI- PURPOSE | BASKETBALL | VOLLEYBALL AEROBICS | TRAINING FACILITY | COMPETITION LEVEL

## **Product Specifications**

Nominal Thickness	11 mm	
<b>O</b> Character	Point-Elastic	
Shock Absorption	28%	EN 14808
Vertical Deformation	1.4 mm	EN 14809
Ball Bounce	98%	EN 12235
Resistance to Rolling Load	≥ 1500 N	EN 1569
Resistance to Impact	≥ 800 gr @ 10°C ≥ 1200 gr @ 17°C	EN 1517 EN 1517
Resistance to Indentation	0.35 mm @ 5 min 0.15 mm @ 24 hrs	EN 1516 EN 1516
V.O.C. Content- Adhesive V.O.C. Content- Finish	Solvent Free 45 gr/lit	ASTM D 3960
Elongation at break- Structure Tensile Strength- Structure Tear Strength- Structure	150% 8 N/mm <sup>2</sup> 25 N/mm	DIN 53455 DIN 53455 DIN 53515
<b>O</b> Warranty	25 YEAR manufacturer's warranty	

#### 16 Classic Colors to Choose From




Classic 110 Meets the Following Organizational Approvals

.....

robbinsfloor.com | 1.800.543.1913

## **PULASTIC® STANDARD COLORS**

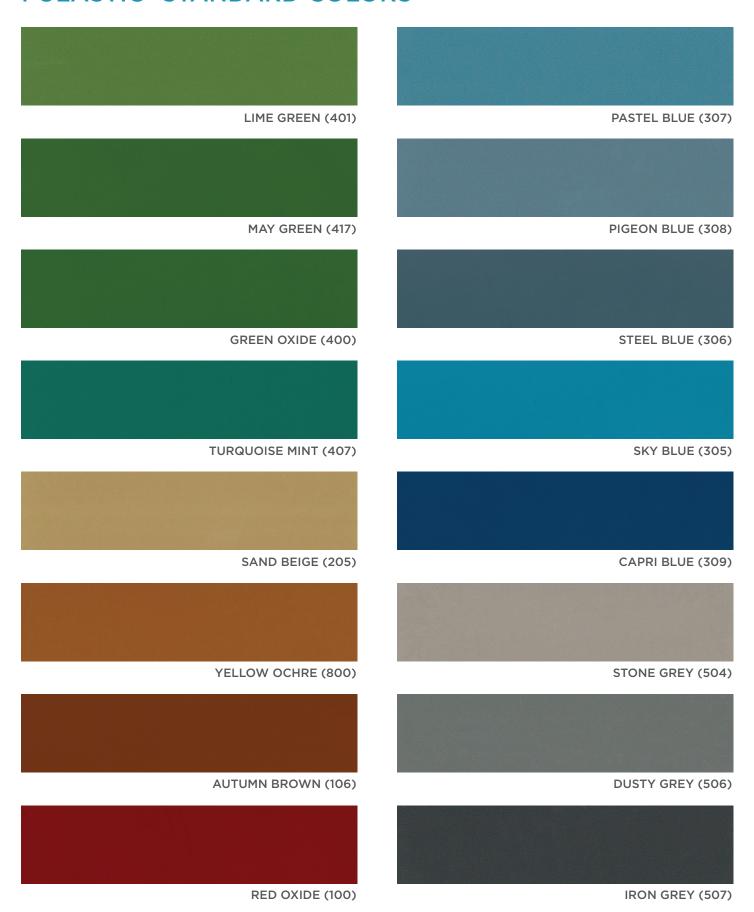

## **PULASTIC® DESIGNER COLORS**



## **PULASTIC® LINEMARKING COLORS**





All Rights Reserved. ©2023 Robbins, Inc.