


**PULASTIC CLASSIC 110**

*A seamless multi-purpose sports floor that provides strength and performance for all levels of play and competition*

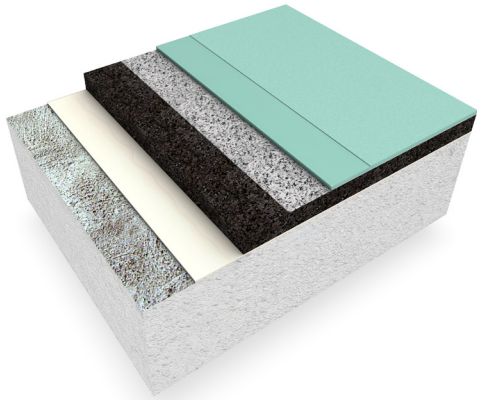

**PULASTIC**<sup>®</sup>  
**SPORTS FLOORING**

- ✔ Pulastic Classic 110 is approved according to the EN 14904 Standard - Category P1
- ✔ Approved by FIBA and IHF
- ✔ Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
- ✔ Good resiliency for comfort and injury prevention
- ✔ Seamless, non-porous and smooth surface for easy maintenance, repair and resurface options
- ✔ Excellent contact noise reduction for outstanding acoustic isolation
- ✔ Sustainability through high content of recycled and rapidly renewable raw materials
- ✔ Water based finish for very low odor during installation and maximum indoor clean air protection during use
- ✔ Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability



**PROVEN  
Safety**

**PROVEN  
Performance**

**PROVEN  
Winners**

INDOOR | MULTI-PURPOSE | BASKETBALL | VOLLEYBALL  
 AEROBICS | TRAINING FACILITY | COMPETITION LEVEL

## Product Specifications

<i>Nominal Thickness</i>	11 mm	
<i>Character</i>	Point-Elastic	
<i>Shock Absorption</i>	28%	EN 14808
<i>Vertical Deformation</i>	1.4 mm	EN 14809
<i>Ball Bounce</i>	98%	EN 12235
<i>Resistance to Rolling Load</i>	≥ 1500 N	EN 1569
<i>Resistance to Impact</i>	≥ 800 gr @ 10°C	EN 1517
	≥ 1200 gr @ 17°C	EN 1517
<i>Resistance to Indentation</i>	0.35 mm @ 5 min	EN 1516
	0.15 mm @ 24 hrs	EN 1516
<i>V.O.C. Content- Adhesive</i>	Solvent Free	
<i>V.O.C. Content- Finish</i>	45 gr/lit	ASTM D 3960
<i>Elongation at break- Structure</i>	150%	DIN 53455
<i>Tensile Strength- Structure</i>	8 N/mm <sup>2</sup>	DIN 53455
<i>Tear Strength- Structure</i>	25 N/mm	DIN 53515
<i>Warranty</i>	<b>25 YEAR</b> manufacturer's warranty	

## 16 Classic Colors to Choose From



\*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.



robbinsfloor.com | 1.800.543.1913