


## PULASTIC CLASSIC 90

*A seamless multi-purpose sports floor that provides comfort and safety for all levels of competition, along with excellent resistance to mechanical loads*



-  Approved by FIBA and IHF
-  Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
-  Good resiliency for comfort and injury prevention
-  Seamless, non-porous and smooth surface for easy maintenance, repair and resurface options
-  Excellent contact noise reduction for outstanding acoustic isolation
-  Sustainability through high content of recycled and rapidly renewable raw materials
-  Water based finish for very low odor during installation and maximum indoor clean air protection during use
-  Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability

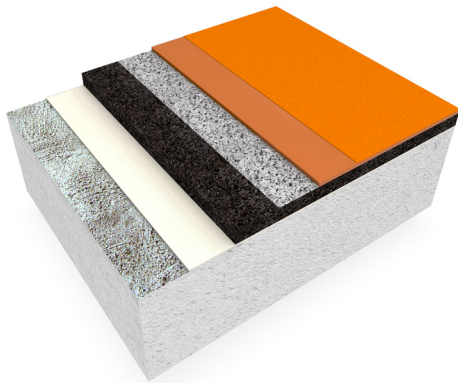

**PULASTIC**®  
SPORTS FLOORING



**PROVEN**  
Safety

**PROVEN**  
Performance

**PROVEN**  
Winners

INDOOR | MULTI-PURPOSE | BASKETBALL | VOLLEYBALL  
 AEROBICS | TRAINING FACILITY | COMPETITION LEVEL

## Product Specifications

<i>Nominal Thickness</i>	9 mm	
<i>Character</i>	Point-Elastic	
<i>Shock Absorption</i>	29%	DIN 18032-91
<i>Vertical Deformation</i>	1.0 mm	EN 14809
<i>Ball Bounce</i>	98%	EN 12235
<i>Resistance to Rolling Load</i>	≥ 1500 N	EN 1569
<i>Resistance to Impact</i>	≥ 800 gr @ 10°C	EN 1517
<i>Resistance to Indentation</i>	0.35 mm @ 5 min	EN 1516
	0.15 mm @ 24 hrs	EN 1516
<i>V.O.C. Content- Adhesive</i>	Solvent Free	
<i>V.O.C. Content- Finish</i>	45 gr/lit	ASTM D 3960
<i>Elongation at break- Structure</i>	150%	DIN 53455
<i>Tensile Strength- Structure</i>	8 N/mm <sup>2</sup>	DIN 53455
<i>Tear Strength- Structure</i>	25 N/mm	DIN 53515
<i>Warranty</i>	<b>25 YEAR</b> manufacturer's warranty	

## 16 Classic Colors to Choose From



\*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.

Robbins is proud to partner with the following organizations:



robbinsfloor.com | 1.800.543.1913