

Pro 165 Comfort

PULASTIC PRO 165 COMFORT

A multi-purpose sports floor with extra comfort to provide competition level strength and performance









- Pulastic Pro 165 Comfort is approved according to the EN 14904 Standard Category P3
- Approved by FIBA and IHF
- Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
- Outstanding resiliency for comfort and injury prevention
- Seamless, non-porous and smooth surface for easy maintenance, repair and resurfacing options
- Water based finish for low odor emissions during installation and maximum indoor clean air protection
- Sustainability through high content of recycled and renewable raw materials
- Thicker pad provides excellent contact noise reduction and thermal insulation
- Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability

PROVEN Safety

PROVEN Performance

PROVENWinners



Pro 165 Comfort

INDOOR | MULTI- PURPOSE | BASKETBALL | GYMNASTICS

VOLLEYBALL | AEROBICS | TRAINING FACILITY | COMPETITION LEVEL

Product Specifications

Nominal Thickness	16.5 mm	
O Character	Point-Elastic	
Shock Absorption	49%	EN 14808
Vertical Deformation	3.7 mm	EN 14809
Ball Bounce	97%	EN 12235
Resistance to Rolling Load	≥ 1500 N	EN 1569
Resistance to Impact	≥ 800 gr @ 10°C ≥ 1200 gr @ 17°C	EN 1517 EN 1517
Resistance to Indentation	0.35 mm @ 5 min 0.13 mm @ 24 hrs	EN 1516 EN 1516
V.O.C. Content- Adhesive	Solvent Free 45 gr/lit	ASTM D 3960
Elongation at break- Structure Tensile Strength- Structure Tear Strength- Structure	200% 10 N/mm ² 25 N/mm	DIN 53455 DIN 53455 DIN 53515
O Warranty	25 YEAR manufacturer's warranty	

16 Classic Colors to Choose From




*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.



robbinsfloor.com | 1.800.543.1913

PULASTIC® STANDARD COLORS

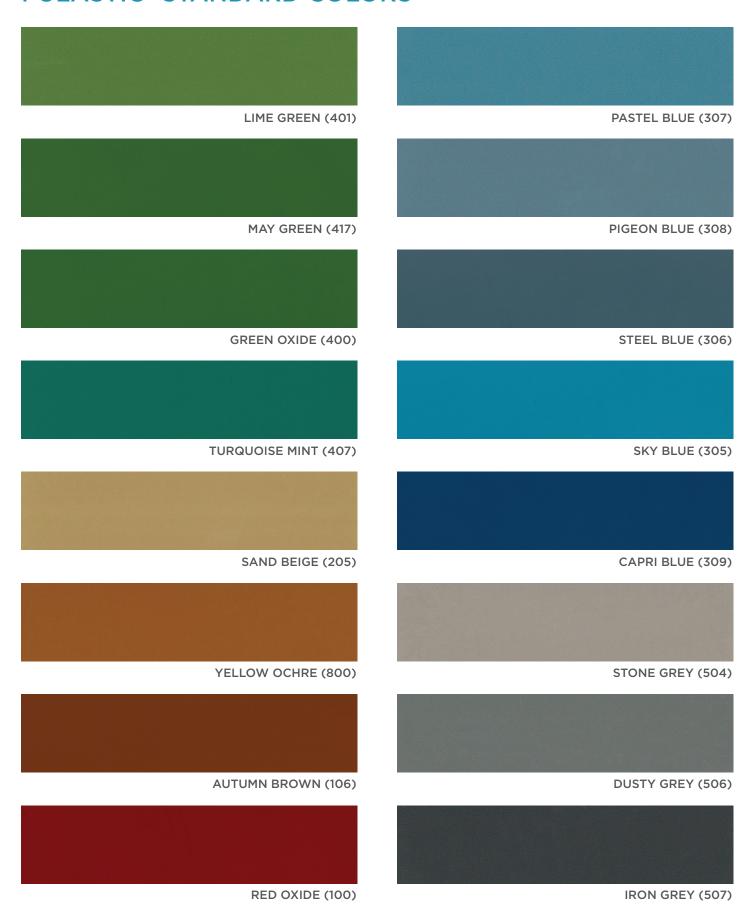

PULASTIC® DESIGNER COLORS



PULASTIC® LINEMARKING COLORS





All Rights Reserved. ©2023 Robbins, Inc.