







Hammered rubber surface with multicolored granules.



THICKNESS 0.138 in (3.5 mm)



TILES 39 3/8 in x 39 3/8 in (100 cm x 100 cm)



~1.15 lb/ft² (~5.6 kg/m²)

DURABILITY

Proven wear abrasion resistance - ASTM D3389 High stain and chemical resistance - ASTM F925

Great static and rolling load resistance 15-year warranty on excessive wear

COMFORT

Noise absorption qualities for improved acoustics - ISO 10140-3 Increased underfoot comfort with anti-fatigue properties Superior product resiliency

LIFE-CYCLE COST/EASE OF MAINTENANCE

Low overall cost of ownership from savings on maintenance Demonstrated long life expectancy No waxing required

SAFETY

Excellent fungal, bacterial and microbial resistance throughout Slip resistance - complies with ADA 302 Floor and ground surfaces Class 1 fire rated - ASTM E648 Resistance to Fungi - ASTM G21

ENVIRONMENTAL STEWARDSHIP

EPD and HPD


100% recyclable

Does not contain any LBC red listed ingredient

GREENGUARD Gold certified

Meets CA section 01350

Cradle to Cradle Certified® Silver

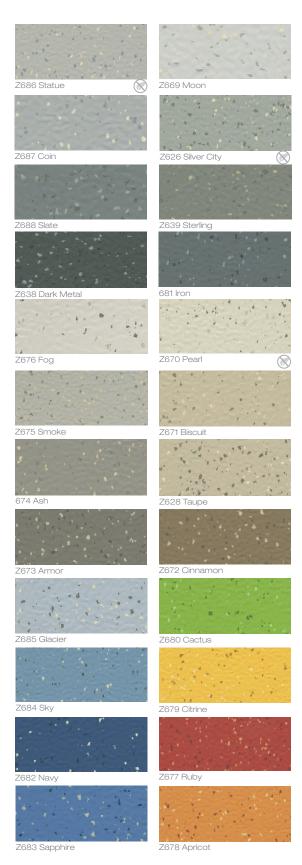



















Sustainability Credential